







### ... OR CODE

# 16 MEMORY POSITIONS FOR CODES OR FINGERPRINTS:









## THE 16TH POSITION IS RESERVED TO THE MASTER FINGERPRINT

this, if memorized, not only allows the opening, but controls other fingerprints' operations. If present, the Master fingerprint will be always required to confirm memorising or erasing operations of other fingerprints.

# AUDIT TRAIL OF THE LAST 60 OPERATIONS IN THE MEMORY TO KNOW, WITH THE DOOR OPENED:

- who last opened the safe and when (date, time and which memory position has opened the door);
- how many attempts have been made to open the safe with wrong codes;
- if and when the safe activated the safety block;
- if and for how long an opening delay has been activated;
- if the safe was opened with the patented emergency key;
- changes to the menu settings.

#### SPECIAL SECURITY FUNCTIONS

RAM-TOUCH II

Climate T:+020°C H:029%

Ram-Touch controls temperature and humidity inside the safe.

Humidity alarm [OFF] ON

An acoustic alarm that can be activated by the user warns of the possible formation of condensation to prevent the oxidation of jewels or watches or damage to any documents.

4.1 Delayed opening

**Opening delay (break-in-proof):** the time delay can be set by the user.

4.2 Silent alarm

4.4 Vibration

Allarme silenzioso e allarme vibrazione set up for connection to a burglar alarm and/or to a dialer. For real time warning, if the safe is opened with a memorized fingerprint or code but under constraint, or

to warn in case of burglary attempt.

#### THE RAM-TOUCH II RECOGNITION SYSTEM:

- is a patented Viro exclusive;
- fingerprints can be memorized or erased with simple operations, but only with the door open;
- recognizes fingerprints by swiping your fingertip across the reader;
- it is powered by 4 alkaline 1.5 Volt batteries;
- it shows the battery recharging level and warns, wih acoustic and visual signals, that the batteries are almost flat;
- it has got a non-volatile memory, which means that stored codes and fingerprints, and the audit trail data, are not erased if the batteries are removed.
- WITH AN EMERGENCY OPENING CYLINDER AND TWO
  PATENTED PROFILE KEYS, THAT CAN BE ONLY DUPLICATED BY VIRO (sending a fax with a photocopy of the ownership card supplied in a sealed envelope with the keys). The cylinder is protected by an anti-drill case-hardened steel plate, resistant to attack.




 OPTIONAL - EXTERNAL POWER SUPPLY: that, if the batteries are completely flat and the emergency keys are not available or have been lost, connects to the control panel and transmits the charge necessary to swipe your fingerprint or enter the code and open the safe.

Item. 4642.0314



A richiesta:

### "RAM-TOUCH II" SAFES ARE AVAILABLE IN WALL VERSIONS AND FREE STANDING VERSIONS

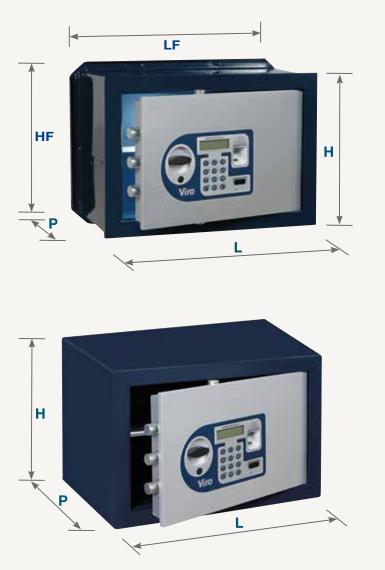



## **RAM-TOUCH II SAFETY CABINETS**



Emergency cylinder, placed under the blue cap, protected by a burglar-resistant, anti-drill plate, in case-hardened and tempered steel."



for ammunition/valuables with Fai by Viro chrome-plated zamák lock with 2 nickelplated brass keys.

#### Per la versione portafucili:




density High scratch-proof polyethylene gun-butt base and barrel support (thicker to guarantee the perfect positioning of single or double barrel guns, even if fitted with optics).



Digital weather station, complete with battery, can be positioned by the user as required, on the cabinet or elsewhere, which provides the following information: date and time; alarm clock; immediate temperature and humidity (with maximum/minimum values and alarm if they reach critical levels); weather forecasts and lunar calendar (item 4450.0315).



The cabinet is painted with technique providing an elegant "wood colour finish"









4480.T10.L

4480.TR10.L

#### For file cabinets:

4 file shelves with dimensions suitable for laptops, printouts and files; 15 Kg. max. capacity each, can be positioned by the user as required.

On request:















		S GER		G 5			
3 0				RAM-TOUCH II SAFES		RAM-TOUCH II CABINETS	
	ITEM NO.	1.4673.20	1.4675.20	1.4693	1.4696	4480.T10.L	4480.TR.L
EXTERNAL DIMENSIONS H x L x P cm.		23x35x20,5	29x41x20,5	29x41x35	79x44x50	150x53,6x38	150x53,6x38
INTERNAL DIMENSIONS H x L x P cm.		21,5x33,5x15,6	27,5x39,5x15,6	28x40,4x30	78x43,4x45	131x53,3x32,7	131x53,3x32,7
DOOR DIMENSIONS H x L cm.		17x29	23x35	23x35	73x38	143x45,5	143x45,5
BASE DIMENSIONS HF x LF cm.		26,2x38,2	32,2x44,2	-	-	-	-
	FRAME	12	12	12	12	2	2
THICKNESS mm.	DOOR	10	10	10	10	2	2
	CASE	2	2	3	3	1,5	1,5
DEADOOLTS NO.	HORIZ.	2	3	3	3	2	2
DEADOOLIS NO.	VERT.	-	2	2	2	2	2
UNIT WEIGHT Kg.		16	21,5	28,5	73	66,5	76
EQUIPMENT		1 SHELF	1 SHELF	1 SHELF	1 SHELF	10 GUN HOUSINGS	4 SHELVES